


RefLED Superia Retro MR16 V3 345LM 830 36 SL

Code article 0031802


SYLVANIA

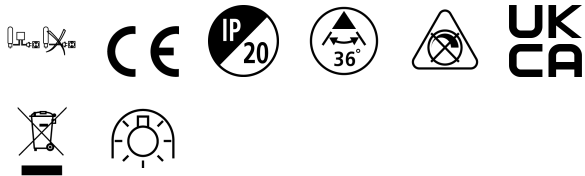

Premium performance professional LED MR16 range with the same look and feel of traditional halogen MR16 lamp. Recreates backlight effect similar to halogen dichroic lamps. Full glass design - means no colours clashing between lamp and fixture. Very long lifetime of up to 25,000 hours. Switching cycles: >100,000. Colour rendering: CRI80. Lamp voltage: 12V AC/DC. Warranty: 5 Years

Atouts techniques

Dimensions (mm)

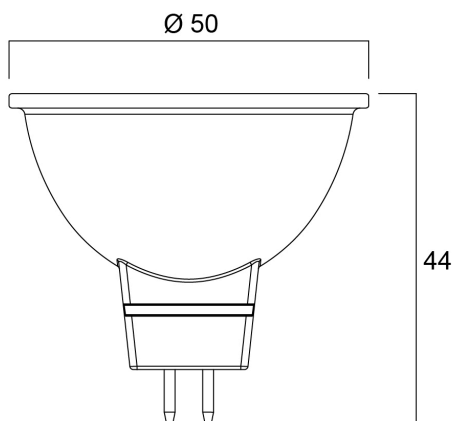

Photométrie

RefLED Superia Retro MR16 V3 345LM 830 36 SL

Code article 0031802



Données générales

Nom du produit	RefLED Superia Retro MR16 V3 345LM 830 36 SL
Technologie	LED
Puissance (nominale) (W)	4.3
Lamp shape	Reflector
Cap/Base	GU5.3
Lamp finish	Fresnel lens
Built in presence detector	NONE
Fixture rating	Open
General application	Education, Hospitality, Museums & Galleries, Residential & Consumer, Retail
Virtual assistant compatibility	N/A
ETIM Class	EC001959
Numéro virtuel FI	4741258
Warranty	5 ans

Données optiques

Useful luminous flux (Φ_{use})	345
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Luminous Intensity (cd)	680
Beam Angle (°)	36
Photobiological Risk Group	RG1

Caractéristiques électriques

Power consumption (W)	4.3
Wattage (W)	4.3
Equivalent watt (W)	35
Actuel (A)	0.55
Primary Supply/Product voltage - min (V)	12.0
Primary Supply/Product voltage - max (V)	12.0
Control gear required	Yes
Type d'appareillage	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Courant d'appel (A)	3.96
Inrush Duration (μ s)	1200
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60/HF

Durée de vie

Lifespan L70 B50	25000
------------------	-------

Données physiques

Housing colour	Transparent
IP rating	IP20
Nominal Product Height (mm)	44
Nominal Product Diameter (mm)	50
Poids (kg)	0.032

RefLED Superia Retro MR16 V3 345LM 830 36 SL

Code article 0031802



Emballage

Product EAN number	5410288318028
Longueur simple de l'emballage (cm)	6.1
Largeur simple de l'emballage (cm)	5.1
Packaging single depth (cm)	8.2
DUN14 (inner)	15410288318025
Units per inner package	6
Packaging inner length / height (cm)	19.4
Packaging inner width (cm)	11.1
Packaging inner depth (cm)	9.2
DUN14 (outer)	25410288318022
Units per outer package	60
Packaging outer length / height (cm)	58.5
Packaging outer width (cm)	20.8
Packaging outer depth (cm)	20.8

Sécurité

Consignes de nettoyage en cas de bris	Not applicable
Lampe à objectif spécial	No
Utilisation pour applications sèches uniquement	Yes
Ne convient pas à l'éclairage résidentiel	Yes
Safety message	Not Suitable for totally enclosed fixtures