

START Downlight Flat 205 IP44 2200LM 830 DIM

Code article 0054124

SYLVANIA


STARTTM



START Downlight Flat IP44 DIM is an integrated LED recessed downlight with a separate phase dimmable driver and Loop in out box; 24W; 2200Lm; 92Lm/W; 3000K; IP44 rated from the front.

Atouts techniques

Dimensions (mm)

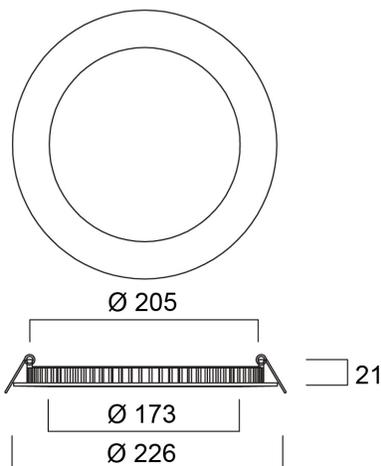


Photométrie

0,5	1,41 1,43	E07 E100 E100	2100 547° 205 95.1° 235
1,0	2,82 2,87	E07 E100 E100	790 547° 79 95.1° 14
1,5	4,24 4,30	E07 E100 E100	351 547° 24 95.1° 31
2,0	5,65 5,73	E07 E100 E100	190 547° 19 95.1° 18
2,5	7,06 7,17	E07 E100 E100	135 547° 12 95.1° 12
3,0	8,47 8,60	E07 E100 E100	88 547° 8 95.1° 8

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 110.2°)
— C90 - C270 (Half beam angle: 109.4°)

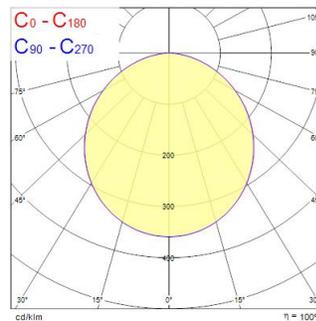

START Downlight Flat 205 IP44 2200LM 830 DIM

Code article 0054124

SYLVANIA

Données générales

Nom du produit	START Downlight Flat 205 IP44 2200LM 830 DIM
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling recessed mounting
Built in presence detector	NONE
General application	Hospitality
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Numéro virtuel FI	4278501
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	2200
Luminaire efficacy (lm/W)	92
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Distribution type	Symmetric
Glare control	< 28
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	24
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20.0
Electrical protection	Class II
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Drive current (mA)	600
Courant d'appel (A)	4.16
Inrush Duration (µs)	112
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	51
Max. products per 13A C Breaker	67
Max. products per 16A C Breaker	82
Max. products per 20A C Breaker	103
Max. products per 10A B Breaker	51
Max. products per 13A B Breaker	67
Max. products per 16A B Breaker	82
Max. products per 20A B Breaker	103
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	1.5

START Downlight Flat 205 IP44 2200LM 830 DIM

Code article 0054124

SYLVANIA

Durée de vie

Lifespan L70 B50	78000
Lifespan L80 B20	43000
Lifespan L80 B10	42000
Lifespan L90 B10	23000

Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK06
Diffuser finish	Opal
Diffuser material	PS Polystyrene
Finition réflecteur	Not Applicable
Nominal Product Height (mm)	21
Nominal Product Diameter (mm)	226
Built-in diameter (mm)	205
Poids (kg)	0.546

Emballage

Product EAN number	5410288541242
Longueur simple de l'emballage (cm)	25.3
Largeur simple de l'emballage (cm)	5.0
Packaging single depth (cm)	23.3
DUN14 (inner)	15410288541249
Units per outer package	10
Packaging outer length / height (cm)	53.3
Packaging outer width (cm)	27.3
Packaging outer depth (cm)	26.1

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40