


Pixo Small 1490lm 930 NB MB WB White

Code article 0005440

SYLVANIA


PROTM

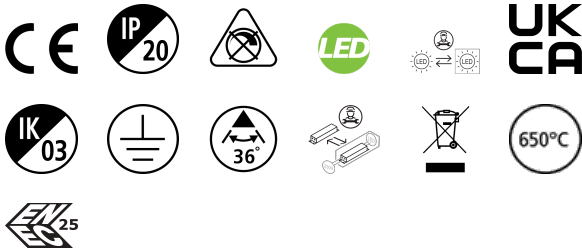

Integrated LED spotlight, Textured White - RAL9016, simple and slick integral design with no driver box and without any visible screws, ideal for retail applications, die-cast aluminium body, passive cooling heatsink. Beam angle: 36°, additional lenses 24° and 54° beam angle included, color temperature: 3000K, total system power: 15W, total fixture output: 1496 lm, LOR: 100%, colour rendering: Ra: 90 typical, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less), power factor: >0.90, electrical protection: Class I, Powergear 3-circuit adapter suitable for 3-circuit tracks, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 345°, vertical tilt: 90°, dimensions: Ø60x70x248, weight: 0.517kg. Compatible with OneTrack.

Atouts techniques


Dimensions (mm)

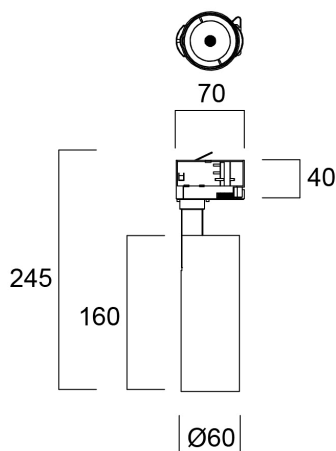

Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [in]	Illuminance [lx]
0.5	0.23	Ø101	13.1"	10009
		Ø100	13.1"	9888
1.0	0.47	Ø101	13.1"	4917
		Ø100	13.1"	2187
1.5	0.70	Ø101	13.1"	3287
		Ø100	13.1"	263
2.0	0.93	Ø101	13.1"	1937
		Ø100	13.1"	562
2.5	1.16	Ø101	13.1"	1497
		Ø100	13.1"	347
3.0	1.40	Ø101	13.1"	917
		Ø100	13.1"	241

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 26.2°)

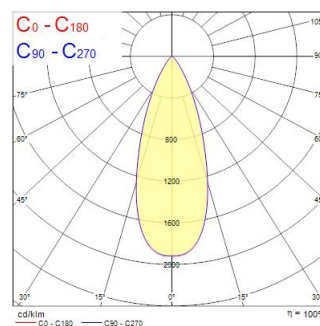

Pixo Small 1490lm 930 NB MB WB White

Code article 0005440

SYLVANIA

Données générales

Nom du produit	Pixo Small 1490lm 930 NB MB WB White
Technologie	LED
Cap/Base	N/A
Montage	Track mounting
Environment	Indoor
General application	Museums & Galleries, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Numéro virtuel FI	4278239
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	1496
Luminaire efficacy (lm/W)	100
Température de couleur (K)	3000
Couleur de lumière	Warm White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	36
Photobiological Risk Group	RG1

Caractéristiques électriques

Consommation électrique totale (W)	15
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
No. Of switching cycles before premature failures	>100000
Dimmable	No
Dimming method	N/A
Drive current (mA)	400
Courant d'appel (A)	12
Inrush Duration (µs)	33
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	68
Max. products per 13A C Breaker	88
Max. products per 16A C Breaker	108
Max. products per 20A C Breaker	135
Max. products per 10A B Breaker	68
Max. products per 13A B Breaker	88
Max. products per 16A B Breaker	108
Max. products per 20A B Breaker	135

Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B50	56000
Lifespan L90 B10	41000

Pixo Small 1490lm 930 NB MB WB White

Code article 0005440

SYLVANIA

Données physiques

Housing colour	White
IP rating	IP20
IK rating	IK03
Longueur (mm)	160
Largeur (mm)	60
Nominal Product Height (mm)	245
Nominal Product Diameter (mm)	60
Poids (kg)	0.517

Emballage

Product EAN number	5410288054407
Longueur simple de l'emballage (cm)	8.5
Largeur simple de l'emballage (cm)	8.5
Packaging single depth (cm)	26.0
DUN14 (inner)	15410288054404
Units per outer package	12
Packaging outer length / height (cm)	35.5
Packaging outer width (cm)	27.0
Packaging outer depth (cm)	28.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40