


START Waterproof Twin 1500 IP65 MW 7100lm 840

Code article 0067958


SYLVANIA

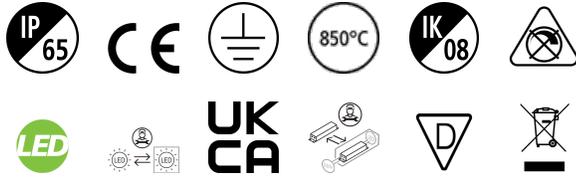

Start Waterproof, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing, Polycarbonate diffuser, 7050lm, 61W, 115lm/W, 4000K, drive current 700mA, MW On/Off, CRI80, IP65, IK08, Class I, nominal average life (h):50000, 1578mm x 110mm x 78mm ,energy class: A++ A+ A, D-mark

Atouts techniques


Dimensions (mm)

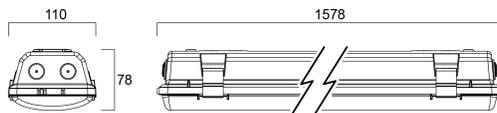

Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	1.14 1.55	0.91 1.24	9000 1299 721
1.0	2.28 3.10	1.82 2.48	2250 325 180
1.5	3.43 4.65	2.73 3.72	1007 144 80
2.0	4.57 6.21	3.64 4.96	567 81 46
2.5	5.71 7.76	4.55 6.15	363 51 30
3.0	6.85 9.31	5.46 7.44	262 36 23

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 114.4°)
 — C90 - C270 (Half beam angle: 97.6°)

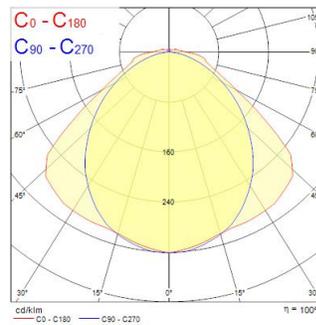

START Waterproof Twin 1500 IP65 MW 7100lm 840

Code article 0067958

SYLVANIA

Données générales

Nom du produit	START Waterproof Twin 1500 IP65 MW 7100lm 840
Technologie	LED
Housing	PC Polycarbonate
Fixture rating	Enclosed
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Numéro virtuel FI	4306956
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	7050
Luminaire efficacy (lm/W)	115
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Glare control	< 26
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	61
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.91
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Drive current (mA)	700
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	25
Max. products per 13A C Breaker	35
Max. products per 16A C Breaker	40
Max. products per 20A C Breaker	50
Max. products per 10A B Breaker	25
Max. products per 13A B Breaker	30
Max. products per 16A B Breaker	40
Max. products per 20A B Breaker	50

Durée de vie

Lifespan L70 B50	60000
Lifespan L70 B20	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B20	60000
Lifespan L80 B10	60000
Lifespan L90 B50	59000
Lifespan L90 B20	53000
Lifespan L90 B10	50000

START Waterproof Twin 1500 IP65 MW 7100lm 840

Code article 0067958

SYLVANIA

Données physiques

Housing colour	Grey
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Longueur (mm)	1578
Largeur (mm)	110
Nominal Product Height (mm)	78
Poids (kg)	2.45

Emballage

Product EAN number	5410288679587
Longueur simple de l'emballage (cm)	167.2
Largeur simple de l'emballage (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (inner)	05410288679587
Units per outer package	1
Packaging outer length / height (cm)	167.2
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4

Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	-20-40
Utilisation pour applications sèches uniquement	No